

**TECHNICAL
 SPECIFICATION**


BULLETIN NO. : DAI:AR-400-2.3
 EFFECTIVE : APRIL 01, 2016
 SUPERCEDES : DAI:AR-400-2.2
 DATED : MAY 01, 2008

**AIR RECEIVER
 WITH INSPECTION HOLE**

SPECIAL FEATURES	OPTIONAL FEATURES	STD. WORKING PARAMETERS
<ul style="list-style-type: none"> Wide range of 11 standard models Capacities from 0.5 m3 to 15.0 m3. Higher capacities - available on request Compact design. Receivers in accordance with delair standard design code. Instrumentation such as – pressure gauge, safety relief valve, manual drain etc. With receiver. Duly tested – pneumatically & hydrostatically 	<ul style="list-style-type: none"> Auto drain valve Construction according to other various codes 	<ul style="list-style-type: none"> Pressure : 7.0 Kg/Cm2(g) Temperature : Up to 60 Deg. C <p>Note : For other working conditions please contact factory.</p>

SPECIFICATION SHEET

MODEL NO.	CAPACITY IN M3	DIMENSIONS (IN MM)		CONNECTION (IN MM)	WEIGHT (IN KG)
		ØD	H~		
REC-0.5	0.5	700	1915	50	240
REC-1.0	1.0	850	2385	50	390
REC-1.5	1.5	1050	2440	50	500
REC-2.0	2.0	1150	2570	50	560
REC-3.0	3.0	1150	3590	65	735
REC-4.0	4.0	1300	3635	65	840
REC-5.0	5.0	1350	4180	65	990
REC-6.0	6.0	1500	4135	80	1400
REC-7.5	7.5	1600	4275	100	1550
REC-10.0	10.0	1850	4420	100	2280
REC-15.0	15.0	2250	4530	150	3400

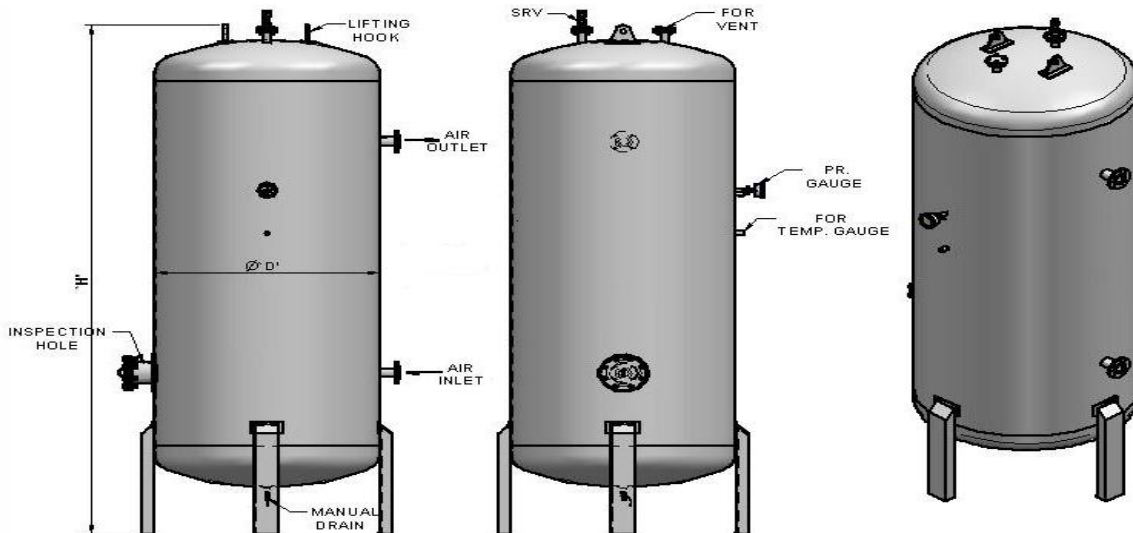

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE