



**delair (india) pvt. ltd.**

Plot No. 21C, Sector 18, Gurgaon-122015  
 Phone : 91-124-4091111 Fax : 91-124-4091100  
 E-Mail : delair@pahwa.com

**TECHNICAL SPECIFICATION**

BULLETIN NO. : DAI:AR-400-3.2  
 EFFECTIVE : MAY 01, 2008  
 SUPERSEDS : DAI:AR-400.1  
 DATED : JAN 02, 2006


**AIR RECEIVER WITH MAN HOLE**

AIR RECEIVER STANDARD WITH

| SPECIAL FEATURES   | OPTIONAL FEATURES   |
|--|---|
| <ul style="list-style-type: none"> <li>Wide range of 11 standard models</li> <li>Capacities from 0.5 m3 to 15.0 m3.</li> <li>Higher capacities - available on request</li> <li>Compact design</li> <li>Receivers in accordance with international design code like - ASME, IS-2825, BS etc.</li> <li>Instrumentation such as – pressure gauge, safety relief valve, manual drain etc. with receiver.</li> <li>Duly tested – pneumatically &amp; hydrostatically</li> </ul> | <ul style="list-style-type: none"> <li>Auto drain valve</li> <li>Construction according to other various codes</li> </ul> |

**Specification Sheet for Air Receiver with Man Hole**

| MODEL NO. | CAPACITY IN M3 | DIMENSIONS ( IN MM ) |      | CONNECTION ( IN MM ) | WEIGHT ( IN KG ) |
|-----------|----------------|----------------------|------|----------------------|------------------|
|           |                | D                    | H    |                      |                  |
| REC-0.5   | 0.5            | 700                  | 1915 | 50                   | 275              |
| REC-1.0   | 1.0            | 850                  | 2385 | 50                   | 420              |
| REC-1.5   | 1.5            | 1050                 | 2425 | 50                   | 605              |
| REC-2.0   | 2.0            | 1000                 | 3260 | 50                   | 700              |
| REC-3.0   | 3.0            | 1150                 | 3580 | 65                   | 1035             |
| REC-4.0   | 4.0            | 1300                 | 3655 | 65                   | 1190             |
| REC-5.0   | 5.0            | 1350                 | 4180 | 65                   | 1360             |
| REC-6.0   | 6.0            | 1500                 | 4100 | 80                   | 1735             |
| REC-7.5   | 7.5            | 1600                 | 4275 | 100                  | 1995             |
| REC-10.0  | 10.0           | 1850                 | 4420 | 100                  | 2795             |
| REC-15.0  | 15.0           | 2250                 | 4530 | 150                  | 4030             |

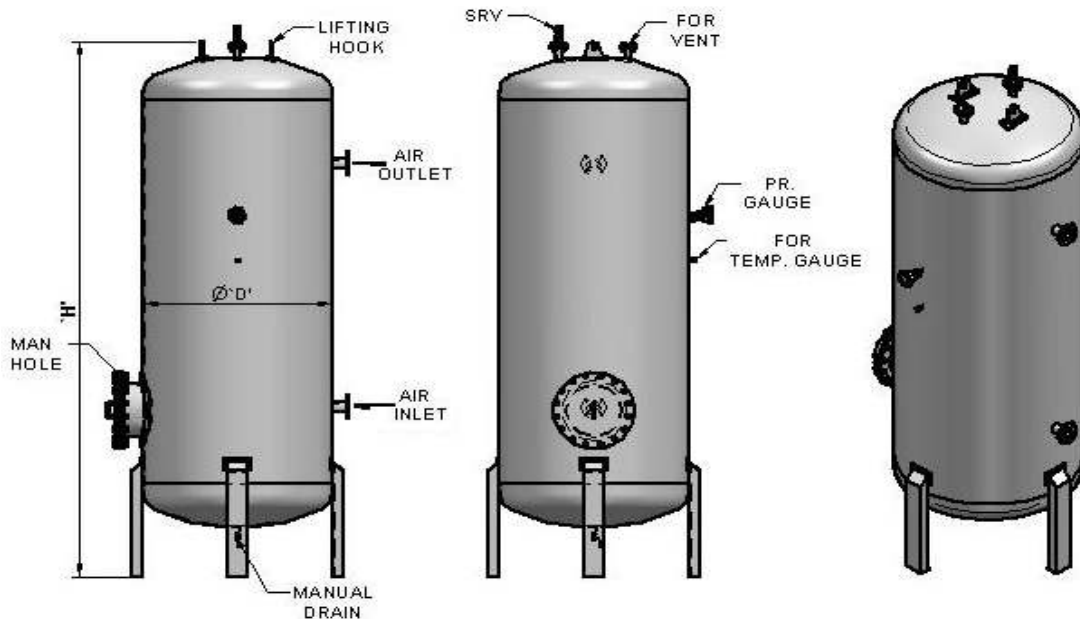

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE