


**AIR RECEIVER
WITH INSPECTION HOLE**

AIR RECEIVER STANDARD WITH

| SPECIAL FEATURES | OPTIONAL FEATURES |
|---|---|
| <ul style="list-style-type: none"> Wide range of 11 standard models Capacities from 0.5 m3 to 15.0 m3. Higher capacities - available on request Compact design Receivers in accordance with delair standard design code. Instrumentation such as – pressure gauge, safety relief valve, manual drain etc. With receiver. Duly tested – pneumatically & hydrostatically | <ul style="list-style-type: none"> Auto drain valve Construction according to other various codes |

Specification Sheet for Air Receiver with Inspection Hole

| MODEL NO. | CAPACITY IN M3 | DIMENSIONS (IN MM) | | CONNECTION (IN MM) | WEIGHT (IN KG) |
|-----------|-------------------|-------------------------|------|-------------------------|---------------------|
| | | D | H | | |
| REC-0.5 | 0.5 | 700 | 1915 | 50 | 240 |
| REC-1.0 | 1.0 | 850 | 2385 | 50 | 390 |
| REC-1.5 | 1.5 | 1050 | 2440 | 50 | 500 |
| REC-2.0 | 2.0 | 1150 | 2570 | 50 | 560 |
| REC-3.0 | 3.0 | 1150 | 3590 | 65 | 735 |
| REC-4.0 | 4.0 | 1300 | 3635 | 65 | 840 |
| REC-5.0 | 5.0 | 1350 | 4180 | 65 | 985 |
| REC-6.0 | 6.0 | 1500 | 4135 | 80 | 1400 |
| REC-7.5 | 7.5 | 1600 | 4275 | 100 | 1550 |
| REC-10.0 | 10.0 | 1850 | 4420 | 100 | 2280 |
| REC-15.0 | 15.0 | 2250 | 4530 | 150 | 3400 |

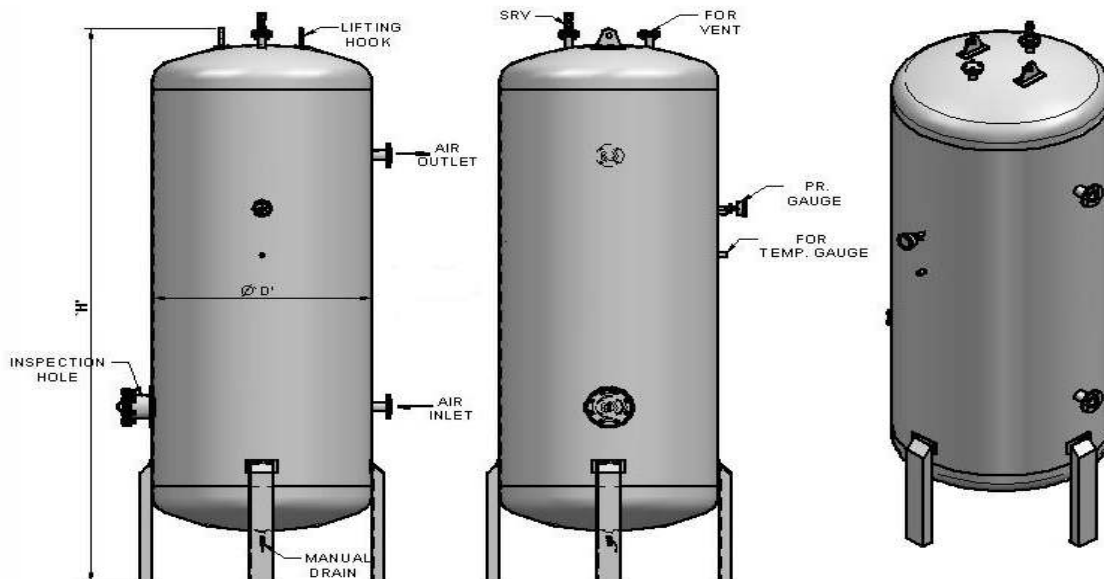

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE