


**AIR RECEIVER  
WITH MAN HOLE**

SPECIAL FEATURES	OPTIONAL FEATURES	STD. WORKING PARAMETERS
<ul style="list-style-type: none"> <li>Wide range of 11 standard models</li> <li>Capacities from 0.5 m3 to 15.0 m3.</li> <li>Higher capacities - available on request</li> <li>Compact design</li> <li>Receivers in accordance with international design code like - ASME, IS-2825, etc.</li> <li>Instrumentation such as - pressure gauge, safety relief valve, manual drain etc. with receiver.</li> <li>Duly tested - pneumatically &amp; hydrostatically</li> </ul>	<ul style="list-style-type: none"> <li>Auto drain valve</li> <li>Construction according to other various codes</li> </ul>	<ul style="list-style-type: none"> <li>Pressure : 7.0 Kg/Cm2(g)</li> <li>Temperature : Up to 60 Deg. C</li> </ul> <p>Note : For other working conditions please contact factory.</p>

**SPECIFICATION SHEET**

MODEL NO.	CAPACITY IN M3	DIMENSIONS ( IN MM )		CONNECTION ( IN MM )	WEIGHT ( IN KG )
		ØD	H~		
REC-0.5	0.5	700	1915	50	275
REC-1.0	1.0	850	2385	50	420
REC-1.5	1.5	1050	2425	50	600
REC-2.0	2.0	1000	3260	50	700
REC-3.0	3.0	1150	3580	65	1035
REC-4.0	4.0	1300	3655	65	1200
REC-5.0	5.0	1350	4180	65	1360
REC-6.0	6.0	1500	4100	80	1735
REC-7.5	7.5	1600	4275	100	2000
REC-10.0	10.0	1850	4420	100	2800
REC-15.0	15.0	2250	4530	150	4030

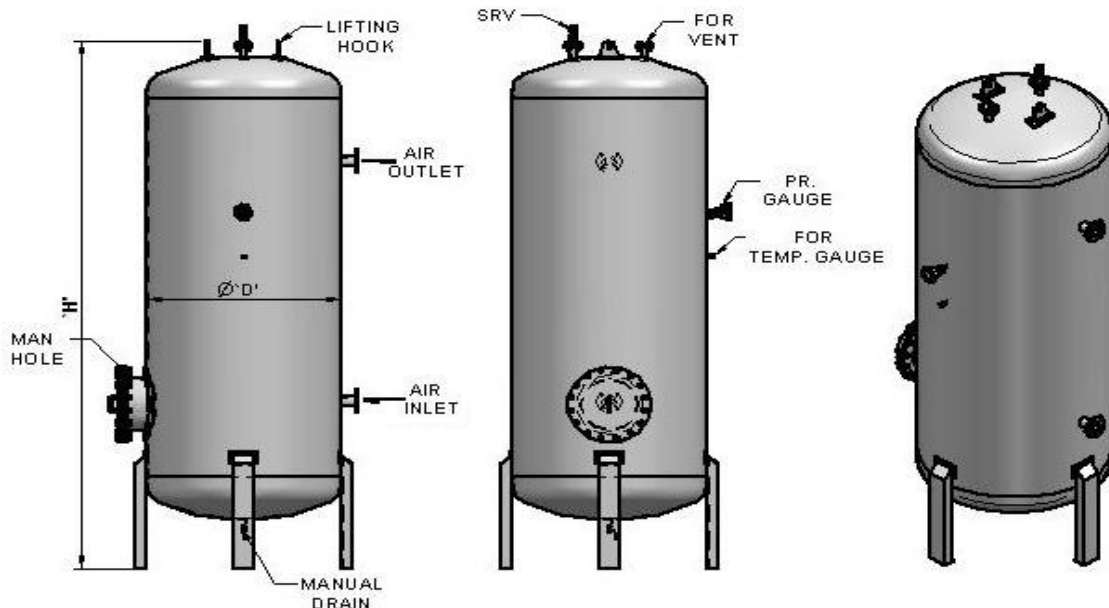

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE