

**TECHNICAL  
SPECIFICATION**


BULLETIN NO. : DAI:AR-400-1.3  
EFFECTIVE : APRIL 01, 2016  
SUPERCEDES : DAI:AR-400.1.2  
DATED : MAY 01, 2008

**AIR RECEIVER  
WITHOUT HOLE**

SPECIAL FEATURES	OPTIONAL FEATURES	STD. WORKING PARAMETERS
<ul style="list-style-type: none"> <li>Wide range of 11 standard models</li> <li>Capacities from 0.5 m3 to 15.0 m3.</li> <li>Higher capacities - available on request</li> <li>Compact design</li> <li>Receivers in accordance with delair standard design code.</li> <li>Instrumentation such as - pressure gauge, safety relief valve, manual drain etc. with receiver.</li> <li>Duly tested - pneumatically &amp; hydrostatically</li> </ul>	<ul style="list-style-type: none"> <li>Auto drain valve</li> <li>Construction according to other various codes</li> </ul>	<ul style="list-style-type: none"> <li>Pressure : 7.0 Kg/Cm2(g)</li> <li>Temperature : Up to 60 Deg. C</li> </ul> <p>Note : For other working conditions please contact factory.</p>

**SPECIFICATION SHEET**

MODEL NO.	CAPACITY IN M3	DIMENSIONS (IN MM)		CONNECTION (IN MM)	WEIGHT (IN KG)
		ØD	H~		
REC-0.5	0.5	700	1915	50	215
REC-1.0	1.0	850	2385	50	365
REC-1.5	1.5	1050	2440	50	475
REC-2.0	2.0	1150	2570	50	535
REC-3.0	3.0	1150	3590	65	710
REC-4.0	4.0	1300	3635	65	815
REC-5.0	5.0	1350	4180	65	960
REC-6.0	6.0	1500	4135	80	1370
REC-7.5	7.5	1600	4275	100	1520
REC-10.0	10.0	1850	4420	100	2250
REC-15.0	15.0	2250	4530	150	3375

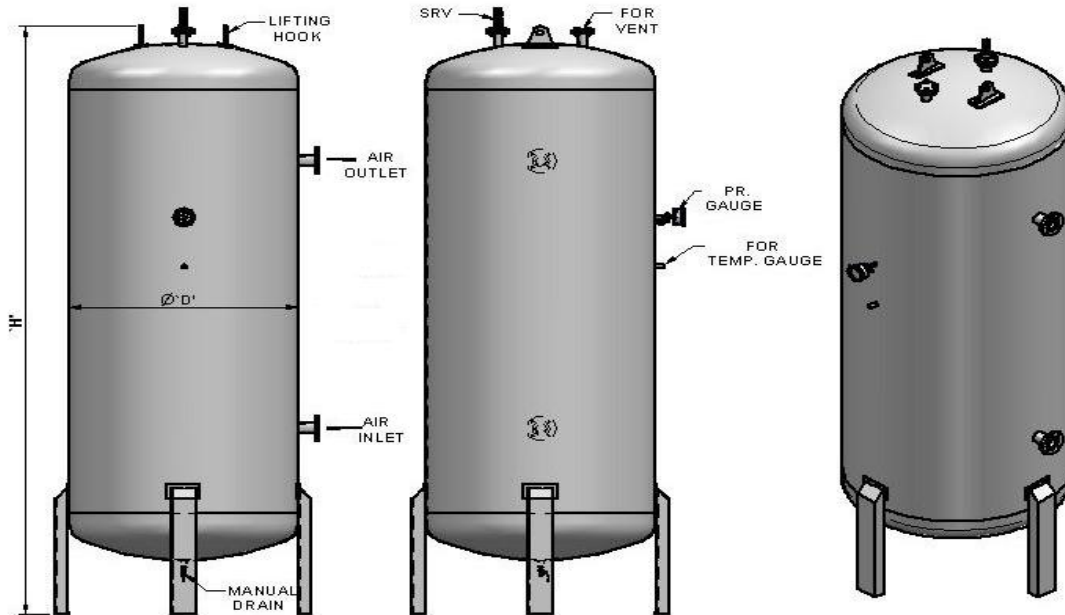

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE